

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/EP05/050944

International filing date: 23 February 2005 (23.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0404588.6  
Filing date: 01 March 2004 (01.03.2004)

Date of receipt at the International Bureau: 12 April 2005 (12.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/EP200 5 / 0 5 0 9 : 4 4



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*Stephen Hordley*


Dated 3 March 2005



1977  
(16)

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

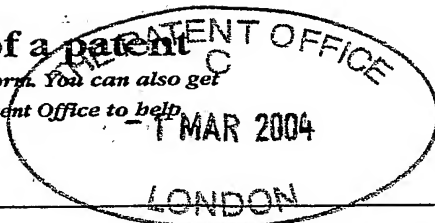

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

GBP14991A

2. Patent application number

(The Patent Office will fill in this part)

0404588.6

1 MAR 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)

BASF Coatings AG  
Glasuritstr. 1  
48165 Münster  
Germany

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

7549165002

Germany

4. Title of the invention

PVC Plastics Comprising Effect Pigments, their Preparation and Use in Coil Coating

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Miller Sturt Kenyon  
9 John Street  
London WC1N 2ES

07395486001

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

26

Claim(s)

3

Abstract

1

Drawing(s)

10. If you are also filing any of the following; state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

1

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

Ms S E Kenyon

1st March 2004

12. Name and daytime telephone number of person to contact in the United Kingdom

Ms S E Kenyon 020 7242 5974

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

**DUPLICATE****PVC plastisols comprising effect pigments, their preparation and use in coil coating**

The present invention relates to novel PVC plastisols comprising effect pigments. The present invention also relates to a new process for preparing PVC plastisols comprising effect pigments. The present invention further relates to the use of the novel PVC plastisols comprising effect pigments and of the PVC plastisols comprising effect pigments prepared by the novel process in coil coating for producing effect coatings and also color and effect coatings.

PVC plastisols are colloidal dispersions of polyvinyl chloride (PVC) prepared by emulsion or microemulsion polymerization in plasticizers. When the PVC plastisols are heated the plasticizers diffuse into the dispersed polymer particles, where they lodge between the macromolecules and hence produce plasticization of the PVC plastisols. After cooling, highly elastic, abrasion-resistant, and dimensionally stable coatings are obtained.

In automotive OEM finishing PVC plastisols further comprising pigments, fillers, and heat stabilizers are used as additional coatings to counter mechanical damage and corrosion in areas of particular risk of stone chipping (underbody, wheel arches) and for sealing weld seams (seam sealing). Application is normally manual or via special spraying techniques. The temperatures of curing (gelling) are generally situated between 140 and 180°C.

(Cf. Römpp Online, Georg Thieme Verlag, Stuttgart, New York 2003, "PVC plastisols").

PVC plastisols comprising effect pigments, such as platelet-shaped aluminum effect pigments or interference pigments, are known per se. They normally comprise a standard PVC paste resin and a PVC extender resin. The known PVC plastisols comprising effect pigments are suitable  
5 for coil coating.

Coil coating is a special form of the roll coating (Römpf Lexikon Lacke und Druckfarben, Georg Thieme Verlag, Stuttgart, New York, 1998, page 617, "roll coating") and, occasionally, of the spray coating and flow  
10 coating of metal strips ("coils") with liquid coating materials. It is a continuous process: all worksteps, such as cleaning, pretreatment, coating, and curing, etc., are carried out in one operation on one line. Schematically, coil coating embraces the following steps: cleaning and degreasing of the coil are followed by a multistage chemical pretreatment  
15 with subsequent passivation, rinsing and drying. The coils used are in particular of steel, such as galvanized steel, or aluminum. Cooling of the coils is followed by application of the liquid coating material to one or both sides using two or three rolls, usually by the reverse roller-coating method. After a very short evaporation time the film applied is cured thermally at  
20 temperatures from 180 to 260°C for 20 to 60 s. Where a multicoat paint system is being produced, application and cure are repeated. The speeds of coil coating of lines are up to 250 m/min (Römpf Lexikon Lacke und Druckfarben, Georg Thieme Verlag, Stuttgart, New York, 1998, page 55, "coil coating").

25

Since the processing of the metal does not take place until after the coating operation, the resultant coatings need to have extremely high mechanical integrity. The coated coils are used customarily in the architectural sector for producing ceiling and wall elements, doors, pipe  
30 insulation, roller shutters or window profiles, in the vehicle sector for

producing paneling for caravans or truck bodies, and in the household sector for producing profile elements for washing machines, dishwashers, freezers, ice boxes or ranges (cf. Römpp Lexikon Lacke und Druckfarben, Georg Thieme Verlag, Stuttgart, New York, 1998, "coil coating", page 55, and "coil coating materials", page 116).

In the coatings produced from the known PVC plastisols comprising platelet-shaped effect pigments, however, the platelet-shaped effect pigments are not oriented predominantly or exclusively parallel to the surface of the coatings, with the consequence that the desired optical effect of the platelet-shaped effect pigments does not come about in the coatings, or not to the required extent. Thus with platelet-shaped aluminum effect pigments, for example, only coatings with glitter effects can be produced, but not coatings exhibiting a strong color flop or light/dark flop, such as is characteristic of high-grade metallic paint systems.

The use of PVC plastisols comprising effect pigments and of the inherently advantageous coil coating process for producing high-grade effect coatings, or color and effect coatings, for automotive OEM finishing has therefore been unsuccessful to date essentially owing to the fact that the existing coatings comprising effect pigments even prior to deformation do not have the required automobile quality. In particular it is not possible to reproduce the shades and optical effects the automobile industry requires, or the required gloss and overall appearance.

It is an object of the present invention to provide novel PVC plastisols comprising effect pigments, especially platelet-shaped effect pigments, which no longer have the disadvantages of the prior art, which are easy to prepare, and which are preferentially suitable for coil coating.



The novel PVC plastisols comprising effect pigments, especially platelet-shaped effect pigments, are intended to produce novel coatings comprising effect pigments, especially platelet-shaped effect pigments, in which the effect pigments, especially the platelet-shaped effect pigments, are oriented predominantly or exclusively parallel to the surface of the coatings, so that the desired optical effect of the effect pigments, in particular of the platelet-shaped effect pigments, comes about in the coatings to the required extent.

- 10 In particular it is intended that the novel coatings comprising platelet-shaped effect pigments should exhibit a strong color flop or light/dark flop, such as is characteristic of high-grade metallic finishes.

Overall the intention is that the novel PVC plastisols comprising effect pigments, especially platelet-shaped effect pigments, should allow the shades and optical effects the automobile industry requires, and also the required gloss and overall appearance, to be reproduced.

The invention accordingly provides the novel effect pigment PVC plastisols comprising

(A) at least one finely divided PVC homopolymer having particle sizes of from 0.04 to 40  $\mu\text{m}$  which as a dispersion in a plasticizer exhibits dilatancy,

(B) at least one finely divided PVC homopolymer having particle sizes of from 1 to 400  $\mu\text{m}$  which as a dispersion in a plasticizer exhibits pseudoplasticity,

(C) at least one plasticizer, and

(D) at least one effect pigment

5 and referred to below as "PVC plastisols of the invention".

The invention further provides the novel process for producing effect pigment PVC plastisols which involves at least mixing

10 (A) at least one finely divided PVC homopolymer having particle sizes of from 0.5 to 40  $\mu\text{m}$  which as a dispersion in a plasticizer exhibits dilatancy,

15 (B) at least one finely divided PVC homopolymer having particle sizes of from 1 to 400  $\mu\text{m}$  which as a dispersion in a plasticizer exhibits pseudoplasticity,

(C) at least one plasticizer, and

20 (D) at least one effect pigment

with one another and homogenizing the resulting mixture, and which is referred to below as "process of the invention".

25 Further subject matter of the invention will emerge from the description.

In the light of the prior art it was surprising and unforeseeable for the skilled worker that the object on which the present invention was based could be achieved by means of the PVC plastisols of the invention and of  
30 the process of the invention.

In particular it was surprising that the PVC plastisols of the invention were easy to prepare and were preferentially suitable for coil coating.

5 The PVC plastisols of the invention gave novel coatings comprising effect pigments, especially platelet-shaped effect pigments, in which the effect pigments, especially the platelet-shaped effect pigments, were oriented predominantly or exclusively parallel to the surface of the coatings, thereby producing the desired optical effect of the effect pigments, in particular of the platelet-shaped effect pigments, in the coatings of the  
10 invention to the required extent.

In particular the coatings of the invention exhibited a strong color flop or light/dark flop characteristic of high-grade metallic finishes.

15 All in all the PVC plastisols of the invention allow reproduction of the shades and optical effects the automobile industry requires and also of the required gloss and overall appearance.

20 Dilatancy means that the viscosity of a sheared PVC plastisol responds to an increase in shear rate by likewise increasing.

Pseudoplasticity means that the viscosity of a sheared PVC plastisol responds to an increase in shear rate by decreasing.

25 (Cf. in this regard Bruno Vollmert, "Grundriss der Makromolekularen Chemie", E. Vollmert-Verlag, Karlsruhe, 1979, vol. IV, "Macromolecular aggregate states", "4.3.1 Viscosity as a function of flow gradient", pages 77 to 82.)

The PVC plastisols of the invention comprise at least one, especially one, finely divided PVC homopolymer (A) which is preferably preparable by emulsion polymerization or microemulsion polymerization.

- 5 The finely divided PVC homopolymer (A) has particle sizes of from 0.5 to 40  $\mu\text{m}$ , preferably from 0.5 to 30  $\mu\text{m}$ , and in particular from 0.5 to 20  $\mu\text{m}$ . The particle size distribution can be monomodal or multimodal, especially bimodal. In the case of a monomodal particle size distribution the maximum lies preferably between particle sizes of from 1.5 to 15  $\mu\text{m}$ , in  
10 particular between 2 and 10  $\mu\text{m}$ . In the case of a bimodal particle size distribution the maxima lie preferably between particle sizes of from 1 to 4  $\mu\text{m}$ , in particular from 1.5 to 3  $\mu\text{m}$ , and from 4 to 15  $\mu\text{m}$ , in particular from 6 to 15  $\mu\text{m}$ .
- 15 As a PVC plastisol the finely divided PVC homopolymer (A) exhibits dilatancy.

The finely divided PVC homopolymers (A) are commercial products and are sold by, for example, the company Pevikon, Norway, under the brand  
20 name Pevikon®, especially Pevikon® 1510.

The amount of finely divided PVC homopolymer (A) in the PVC plastisols of the invention may vary widely and is guided by the requirements of the case in hand. The PVC plastisols of the invention, based on their total  
25 amount, contain preferably from 20 to 60% by weight, more preferably from 25 to 55% by weight, and in particular from 30 to 50% by weight of finely divided PVC homopolymer (A).

The PVC plastisols of the invention comprise at least one, especially one,  
30 finely divided PVC homopolymer (B) which is preparable preferably by

emulsion polymerization.

The finely divided PVC homopolymer (B) has particle sizes of from 1 to 400  $\mu\text{m}$ , preferably from 1 to 300  $\mu\text{m}$  and in particular from 1 to 200  $\mu\text{m}$ .

- 5 The particle size distribution can be monomodal or multimodal, especially monomodal. In the case of a monomodal particle size distribution the maximum preferably lies between particle sizes of 10 and 100  $\mu\text{m}$ , in particular between 10 and 60  $\mu\text{m}$ .

- 10 As a PVC plastisol the finely divided PVC homopolymer (B) exhibits pseudoplasticity.

The finely divided PVC homopolymers (B) are commercial products and sold by, for example, the company Pevikon, Norway, under the brand

- 15 name Pevikon®, especially Pevikon® 709.

The amount of finely divided PVC homopolymer (B) in the PVC plastisols of the invention may vary widely and is guided by the requirements of the case in hand. The PVC plastisols of the invention, based on their total  
20 amount, contain preferably from 5 to 30% by weight, more preferably from 5 to 25% by weight, and in particular from 10 to 20% by weight of finely divided PVC homopolymer (B).

- The weight ratio of finely divided PVC homopolymer (A) to finely divided  
25 PVC homopolymer (B) may vary very widely. The weight ratio (A) : (B) is preferably chosen so that the PVC plastisols of the invention exhibit pseudoplasticity. The weight ratio (A) : (B) is preferably from 5 : 1 to 1 : 5, more preferably from 4 : 1 to 1 : 1, and in particular from 3 : 1 to 1.5 : 1.

- 30 The PVC plastisols of the invention comprise at least one plasticizer (C)

and preferably at least two, more preferably at least three, and in particular three plasticizers (C). The plasticizers (C) preferably come from different classes of compound. Suitable plasticizers are all those commonly used for PVC. Examples of suitable plasticizers are described by Werner  
5 Sommer in "Taschenbuch der Kunststoff-Additive", R. Gächter and H. Müller (eds.), Carl Hanser Verlag, Munich, Vienna, 1983, "5 plasticizers", pages 261 to 307. The plasticizers (C) are preferably selected from the group consisting of phenolic esters, adipic esters, and butyric esters.

10

The amount of plasticizers (C) in the PVC plastisols of the invention may vary very widely and is guided by the requirements of the case in hand, in particular by their plasticizing effect on the finely divided PVC homopolymers (A) and (B). The amount is preferably from 10 to 60% by  
15 weight, more preferably from 15 to 50% by weight, and in particular from 20 to 40% by weight, based in each case on the total amount of a PVC plastisol of the invention.

The plastisols of the invention comprise at least one effect pigment (D), in  
20 particular a platelet-shaped effect pigment (D).

The effect pigments (D) are preferably selected from the group consisting of organic and inorganic, optical effect, color effect and optical effect, magnetically shielding, electrically conductive, anticorrosion, fluorescent,  
25 and phosphorescent pigments, more preferably from the group consisting of organic and inorganic, optical effect, and color effect and optical effect pigments, and in particular from the group consisting of metal effect pigments, effect pigments composed of metals and nonmetals, and nonmetallic effect pigments.

30

The metal effect pigments (D) are, in particular, aluminum effect pigments, iron effect pigments or copper effect pigments, such as commercial aluminum bronzes, aluminum bronzes chromated as in DE 36 36 183 A 1, commercial stainless steel bronzes, and commercial copper bronzes.

5

The effect pigments (D) composed of metals and nonmetals are, in particular, platelet-shaped aluminum pigments coated with iron oxide, as described in, for example, European patent application EP 0 562 329 A 2; glass flakes coated with metals, especially aluminum; or interference  
10 pigments which include a reflector layer of metal, especially aluminum, and show a strong color flop, as described in, for example, American patents US 4,434,010 A 1, US 4,704,356 A 1, US 4,779,898 A 1, US 4,838,648 A 1, US 4,930,866 A 1, US 5,059,245 A 1, US 5,135,812 A 1, US 5,171,363 A 1 or US 5,214,530 A 1.

15

The nonmetallic effect pigments (D) are, in particular, pearlescent pigments, especially micapigments, as described in, for example, Merck Kontakte, 1992, issue 2, pages 3 to 60; platelet-shaped graphite pigments coated with metal oxides, as described in, for example, Japanese patent  
20 application JP 5-311098 A; interference pigments without a metal reflector layer but exhibiting a strong color flop, as described in, for example, American patents US 4,434,010 A 1, US 4,704,356 A 1, US 4,779,898 A 1, US 4,838,648 A 1, US 4,930,866 A 1, US 5,059,245 A 1, US 5,135,812 A 1, US 5,171,363 A 1 or US 5,214,530 A 1; platelet-shaped effect pigments  
25 based on iron oxide and having a shade ranging from pink to brownish red, as described in, for example, the patent applications and patents DE 36 36 156 A 1, DE 37 18 446 A 1, DE 37 19 804 A 1, DE 39 30 601 A 1, EP 0 068 311 A 1, EP 0 264 843 A 1, EP 0 265 820 A 1, EP 0 283 852 A 1, EP 0 293 746 A 1, EP 0 417 567 A 1, US 4,828,826 A or US 5,244,649 A;  
30 or organic, liquid-crystalline effect pigments.

For further details refer to Römpp Lexikon Lacke und Druckfarben, Georg Thieme Verlag, 1998, pages 176, "effect pigments" and pages 380 and 381, "metal oxide-mica pigments" to "metal pigments".

- 5 Examples of fluorescent and phosphorescent pigments (D) (daylight-fluorescent pigments) are bis(azomethine) pigments.

Examples of suitable electrically conductive pigments (D) are titanium dioxide/tin oxide pigments and pulverulent metal pigments.

10

Examples of magnetically shielding pigments (D) are pigments based on iron oxides or chromium dioxide.

- 15 Examples of suitable anticorrosion pigments (D) are zinc powders, lead silicates, zinc phosphates or zinc borates.

Owing to the multiplicity of suitable effect pigments (D) the PVC plastisols of the invention ensure a universal breadth of use and allow production of an extraordinarily wide diversity of coatings with a very wide variety of  
20 physical effects.

- The amount of effect pigments (D) in the PVC plastisols of the invention may vary very widely and is guided by the requirements of the case in hand, in particular by the intensity of the effect it is intended to produce in  
25 the coatings of the invention. The effect pigments (D) are preferably used in the conventional, effective amounts.

The PVC plastisols of the invention may further comprise at least one pigment (E) which is different than the effect pigments (D) and is selected



from the group consisting of organic and inorganic, color and extender pigments, pigments which combine at least two of these properties, and nanoparticles, provided such an additional pigment does not adversely affect the performance properties of the PVC plastisols of the invention.

5

Examples of suitable inorganic color pigments (E) are white pigments such as zinc white, zinc sulfide or lithopones; black pigments such as carbon black, iron manganese black or spinel black; chromatic pigments such as chromium oxide, chromium oxide hydrate green, cobalt green or  
10 ultramarine green, cobalt blue, ultramarine blue or manganese blue, ultramarine violet or cobalt violet and manganese violet, red iron oxide, cadmium sulfoselenide, molybdate red or ultramarine red; brown iron oxide, mixed brown, spinel phases and corundum phases or chromium orange; or yellow iron oxide, nickel titanium yellow, chromium titanium  
15 yellow, cadmium sulfide, cadmium zinc sulfide, chromium yellow or bismuth vanadate.

Examples of suitable organic color pigments (E) are monoazo pigments, disazo pigments, anthraquinone pigments, benzimidazole pigments,  
20 quinacridone pigments, quinophthalone pigments, diketopyrrolopyrrole pigments, dioxazine pigments, indanthrone pigments, isoindoline pigments, isoindolinone pigments, azomethine pigments, thioindigo pigments, metal complex pigments, perinone pigments, perylene pigments, phthalocyanine pigments or aniline black.

25

For further details refer to Römpp Lexikon Lacke und Druckfarben, Georg Thieme Verlag, 1998, pages 180 and 181, "iron blue pigments" to "black iron oxide", pages 451 to 453, "pigments" to "pigment volume concentration", page 563, "thioindigo pigments", page 567, "titanium  
30 dioxide pigments", pages 400 and 467, "naturally occurring pigments",

page 459, "polycyclic pigments", page 52, "azomethine pigments", "azo pigments", and page 379, "metal complex pigments".

5 Examples of suitable extender pigments or fillers (E) are chalk, calcium sulfate, barium sulfate, silicates such as talc or kaolin, silicas, oxides such as aluminum hydroxide or magnesium hydroxide or organic fillers such as textile fibers, cellulose fibers, polyethylene fibers or polymer powders; for further details refer to Römpp Lexikon Lacke und Druckfarben, Georg Thieme Verlag, 1998, pages 250 ff., "fillers".

10

The nanoparticles (E) are preferably selected from the group consisting of main group and transition group metals and their compounds. The main group and transition group metals are preferably selected from metals of main groups three to five, transition groups three to six, and transition  
15 groups 1 and 2 of the periodic table of the elements, and also the lanthanides. Particular preference is given to using boron, aluminum, gallium, silicon, germanium, tin, arsenic, antimony, silver, zinc, titanium, zirconium, hafnium, vanadium, niobium, tantalum, molybdenum, tungsten, and cerium, especially aluminum, silicon, silver, cerium, titanium, and  
20 zirconium. The compounds of the metals are preferably the oxides, oxide hydrates, sulfates or phosphates. Used with preference are silver, silica, alumina, hydrated alumina, titanium dioxide, zirconium oxide, cerium oxide, and mixtures thereof, more preferably silver, cerium oxide, silica, hydrated alumina, and mixtures thereof, very preferably hydrated alumina,  
25 and in particular boehmite. The nanoparticles preferably have a primary particle size  $< 50$  nm, more preferably from 5 to 50 nm, in particular from 10 to 30 nm.

The PVC plastisols of the invention may further comprise at least one, in  
30 particular at least two, additive(s) (F) such as is or are commonly used in

PVC. The additives (F) are preferably selected from the group consisting of PVC stabilizers, light stabilizers, organic solvents, especially high-boiling organic solvents, and synergists for halogen flame retardants. Examples of suitable PVC stabilizers and light stabilizers are described in  
5 "Taschenbuch der Kunststoff-Additive", R. Gächter and H. Müller (eds.), Carl Hanser Verlag, Munich, Vienna, 1983, "4 PVC stabilizers", pages 199 to 260. Further suitable PVC stabilizers are epoxy stabilizers. One suitable high-boiling organic solvent is butyl diglycol acetate. One suitable synergist for halogen flame retardants is antimony trioxide. The additives  
10 (F) are used in the conventional, effective amounts.

The preparation of the PVC plastisols of the invention has no peculiarities in terms of method but instead takes place by the mixing of the above-described constituents (A), (B), (C), and (D) and also, where used, (E)  
15 and/or (F). This can be done using mixing equipment, such as stirred tanks, dissolvers, including inline dissolvers, bead mills, agitator mills, static mixers, toothed-wheel dispersers or extruders.

The PVC plastisols of the invention are outstandingly suitable for use as  
20 coil coating materials. Coil coating starts from a metal strip (the coil) which has been conventionally cleaned, degreased, passivated, chemically treated, rinsed, and dried. The metal coil can be coated on one or both sides.

25 Suitable metals are all those from which it is possible to form coils able to withstand the mechanical, chemical, and thermal stresses of coil coating. Highly suitable metal coils include those based on aluminum or iron. In the case of iron particular suitability is possessed by cold-rolled steels, electrolytically galvanized steels, hot-dip-galvanized steels or stainless  
30 steels. The coils are preferably from 200  $\mu\text{m}$  to 2 mm thick.

For coil coating the metal coil runs through a coil coating line as described in, for example, Römpp Lexikon Lacke und Druckfarben, Georg Thieme Verlag, Stuttgart, New York, 1998, page 55, "coil coating", or German patent application DE 196 32 426 A 1, at a speed adapted to the application and curing properties of the inventive PVC plastisols employed. The speed may therefore vary very widely from one coating operation to another. It is preferably from 10 to 150 m/min, more preferably from 12 to 120 m/min, with particular preference from 14 to 100 m/min, very preferably from 16 to 80 m/min, and in particular from 20 to 70 m/min.

The PVC plastisols of the invention can be applied in any way, by spraying, flow coating or roll coating, for example. Among these application techniques, roll coating is particularly advantageous and is therefore used with preference in accordance with the invention.

Each application step in roll coating can be conducted with two or more rolls. Preference is given to employing from two to four rolls, and especially two rolls.

In the case of roll coating the rotating pick-up roll dips into a reservoir of the PVC plastisol of the invention and so picks up the paint to be applied. This paint is transferred from the pick-up roll to the rotating application roll directly or via at least one transfer roll. The paint is stripped from this application roll and so transferred to the coil as it runs in the same or opposite direction.

As an alternative the PVC plastisol of the invention can be pumped directly into a gap between two rolls, this being referred to by those in the art as

nip feed.

In accordance with the invention, transfer by reverse stripping, or the reverse roller coating technique, is of advantage and is therefore  
5 employed with preference.

In the case of roll coating the circumferential speeds of the pick-up roll and the application roll may vary very greatly from one coating operation to another. The application roll preferably has a circumferential speed which  
10 is from 110 to 125% of the coil speed, and the pick-up roll a circumferential speed which is from 20 to 40% of the coil speed.

The PVC plastisols of the invention are preferably applied in a wet film thickness such that curing of the applied films results in coatings having a  
15 dry film thickness of from 50 to 300  $\mu\text{m}$ , more preferably from 100 to 200  $\mu\text{m}$ , very preferably from 100 to 150  $\mu\text{m}$  and in particular from 110 to 130  $\mu\text{m}$ .

The above-described application methods can also be employed for the  
20 coating materials with which the coatings of the invention are overcoated, unless said coating materials are powder coating materials, in which case the usual special application methods are employed, such as electrostatic powder spraying in the case of coils traveling at slow speed or the powder cloud chamber process, as it is known, in the case of high-speed coils.

25

Heating of the films of the PVC plastisols of the invention in the case of thermal curing is accomplished preferably by convection heat transfer, irradiation with near or far infrared and/or, in the case of iron-based coils, by electrical induction. The maximum substrate temperature or PMT is  
30 preferably at most 200°C, more preferably 180°C, and in particular at most

160°C. It is a very particular advantage of the PVC plastisols of the invention and of the coating processes of the invention that comparatively low temperatures can be employed and yet result in coatings of the invention having outstanding performance properties.

5

The heating time, i.e., the duration of thermal cure or gelling, varies depending on the particular inventive PVC plastisol employed. The time is preferably from 10 s to 2 min.

10 Where essentially convection heat transfer is employed the need is for forced-air ovens with a length of from 30 to 50 m, in particular from 35 to 45 m, at the preferred coil speeds. The forced-air temperature is preferably below 300°C, in particular below 280°C.

15 Where two or more coating materials are applied during coil coating this is done on a correspondingly configured line in which two or more application stations and, where appropriate, curing stations are connected up in series. Alternatively, following the application and curing of the first coating material, e.g., of the PVC plastisol of the invention, the coated coil  
20 is wound up again and then provided on one or both sides on a second, third, etc. coil coating line with second, third, etc., coatings.

After the coated coils of the invention have been produced they can be wound up and then processed further at a different place; alternatively  
25 they can be processed further directly as they come from the coil coating operation. Thus they may be laminated with plastics or provided with removable protective sheets. Following a reduction in size they can be machine-shaped into parts of appropriate size. Examples of suitable machine shaping methods include pressing and deep drawing.

30

The resultant coils, profile elements, and shaped parts of the invention are scratch-resistant, stable to corrosion, stable to weathering, and stable to chemicals and can be overcoated readily with any of a wide variety of coating materials. It is surprising that no pretreatment of the metal coils  
5 with chromate is necessary in order to achieve excellent corrosion protection.

In particular, however, the coils, profile elements, and shaped parts of the invention exhibit outstanding, intensive optical effects, especially intensive  
10 color flops and light/dark flops, which are comparable with those of conventional basecoats such as are used for high-quality automotive OEM finishing.

The coils coated with the coatings of the invention are therefore  
15 outstandingly suitable for applications in automobile construction, for producing, for example, bodywork parts and bodies, including commercial vehicle bodies and paneling for caravans, in the domestic appliance sector for the purpose, for example, of producing washing machines, dishwashers, dryers, ice boxes, freezers or ranges, in the lighting sector  
20 for producing lamps for interior and exterior use, or in the architectural sector, both indoors and outdoors, for the purpose, for example, of producing ceiling and wall elements, doors, gates, pipe insulation, roller shutters or window profiles.

## 25 Inventive and comparative examples

### Examples 1 to 3 (inventive) and C1 to C3 (comparative)

The preparation of PVC plastisols 1 to 3 (examples 1 to 3) and C1 to  
30 C3 (examples C1 to C3)

The PVC plastisols 1 to 3 were prepared by mixing the ingredients indicated in table 1 in the amounts specified therein and homogenizing the resulting mixtures.

5

**Table 1: The physical composition of PVC plastisols 1 to 3 of examples 1 to 3**

Ingredient	Amount (% by weight) in example:		
	1	2	3
<hr/>			
<u>PVC homopolymer (A):</u>			
15 Pevikon® 1510 from Pevikon, Norway	70	70	70
<u>PVC homopolymer (B):</u>			
Pevikon® 709 from Pevikon, Norway	30	30	30
<u>Plasticizers (C):</u>			
Mesamoll® (commercial alkylsulfonic ester of phenol from Bayer Aktiengesellschaft)	10	10	10
25 Plastomoll® DNA (commercial diisononyl adipate from BASF AG)	30	30	30
TXIB® (commercial 2,2,4-trimethyl-1,3-pentanediol diisobutyrate from Eastman)	10	10	10
<u>Effect pigment (D):</u>			
30 STAPA® VP 54277/G/80			



	(commercial 80 percent aluminum effect pigment paste from Eckhart)	4	-	-
	Iridin® Ultra Blau (commercial mica pigment from Merck)	-	6.5	-
5	Variocrom® Magic Purple (commercial interference pigment from BASF AG)	-	-	7

Pigment (E):

10	Irgalit® BLPO (commercial blue pigment, 20 percent in TXIB/diisononyl adipate)	3.32	4	-
	Printex® 140 W (commercial black pigment, 10 percent in diisononyl adipate)	-	0.2	-
15	Irgalit® GLN (commercial green pigment, 25 percent in TXIB/diisononyl adipate)	-	-	2

Additive (F):

	Lankromark® LZC 330 (commercial calcium/zinc PVC stabilizer from Akcros Chemicals)	4	4	4
20	ERL-4221 (commercial cycloaliphatic epoxy resin from Dow Chemicals)	4	4	4
	Sanduvor® VSU (commercial light stabilizer based on oxanilide from Clariant)	0.3	0.3	0.3
25	Butyl diglycol acetate	10	10	10

PVC plastisols 1 to 3 were outstandingly suitable for use as coil coating materials.

The PVC plastisols C1 to C3 were prepared by mixing the ingredients indicated in table 2 in the amounts specified therein and homogenizing the resulting mixtures.

5

**Table 2: The physical composition of PVC plastisols C1 to C3 of examples C1 to C3**

Ingredient	Amount (% by weight) in example:		
	C1	C2	C3
<hr/>			
<u>Standard PVC paste resin:</u>			
15 Pevikon® 1412 from Pevikon, Norway	52	52	52
<u>PVC extender resin:</u>			
Vinnolit® C 65 V from Vinnolit	24	24	24
Vinnolit® C 100 V from Vinnolit	24	24	24
20 <u>Plasticizers (C):</u>			
Mesamoll®	12	12	12
Plastomoll® DNA	7	7	7
TXIB®	18	18	18
25 Dioplex® 7017 (commercial polymeric plasticizer from Hyperlast)	4	4	4
<u>Effect pigment (D):</u>			
STAPA® VP 54277/G/80			
30 (commercial 80 percent aluminum			

	effect pigment paste from Eckhart)	4	-	-
	Iriodin® Ultra Blau (commercial mica pigment from Merck)	-	6.5	-
	Variocrom® Magic Purple			
5	(commercial interference pigment from BASF AG)	-	-	7

Pigment (E):

10	Irgalit® BLPO (commercial blue pigment, 20 percent in TXIB/diisononyl adipate)	3.32	4	-
	Printex® 140 W (commercial black pigment, 10 percent in diisononyl adipate)	-	0.2	-
15	Irgalit® GLN (commercial green pigment 25 percent in TXIB/diisononyl adipate)	-	-	2

Additive (F):

20	Lankromark® LZC 330 (commercial calcium/zinc PVC stabilizer from Akcros Chemicals)	3	3	3
	ERL-4221 (commercial cycloaliphatic epoxy resin from Dow Chemicals)	3	3	3
25	Sanduvor® VSU (commercial light stabilizer based on oxanilide from Clariant)	0.3	0.3	0.3
	Butyl diglycol acetate	12	12	12
30	Antimony trioxide	4	4	4

PVC plastisol C1 served as comparison to PVC plastisol 1. PVC plastisol C2 served as comparison to PVC plastisol 2. PVC plastisol C3 served as comparison to PVC plastisol 3.

#### **Examples 4 to 6 (inventive) and C4 to C6 (comparative)**

The production of effect pigment coatings 1 to 3 (examples 4 to 6) and C1 to C3 (examples C4 to C6)

Coatings 1 to 3 of examples 4 to 6 and coatings C1 to C3 of examples C4 to C6 were produced using the PVC plastisols specified in table 3.

**Table 3: Overview of the PVC plastisols used in examples 4 to 6 and examples C4 to C6**

Example	Coating	PVC plastisol	Example
4	1	1	1
5	2	2	2
6	3	3	3
C4	C1	C1	C1
C5	C2	C2	C2
C6	C3	C3	C3

The PVC plastisols were applied to metal test panels by roll application so that gelling of the applied PVC plastisol films at ...°C for ... seconds gave coatings having a film thickness of ...  $\mu\text{m}$ .

- 5 In contrast to coatings C1 to C3 coatings 1 to 3 showed pronounced intensive light/dark flops (coating 1) or pronounced intensive color flops (coatings 2 and 3), a fact which was underlined by means of colorimetry (CIELAB color space). The relevant measurements are given in tables 4, 5 and 6.

10

**Table 4:** Colorimetric comparison of coatings 1 and C1 (CIELAB color space/illuminant: D65/color difference mode: weighted color coordinates/color difference formula: Audi)

15 **Coating C1**

Angle	L*	a*	b*	C*	h*
15	79.4	- 6.0	- 11.2	12.7	242.1
20 25	63	- 7.8	- 13.6	15.7	240
45	46.2	- 8.9	- 16.5	18.8	241.6
75	37	- 10.2	- 19.6	22.1	242.6

**Coating 1**

25

Angle	dL'	da'	db'	dC'	dH'	dE'	mDE'
15	5.3	- 14	- 11	17.2	- 4.8	18.6	14.2
25	5.7	- 14	- 11.8	17.8	- 4.3	19.1	
30 45	- 1	- 4.4	- 4.5	6.1	- 1.5	6.4	
75	- 11	5.2	3.2	- 5	3.6	12.6	

**Table 5: Colorimetric comparison of coatings 2 and C2 (CIELAB color space/illuminant: D65/color difference mode: weighted color coordinates/color difference formula: Audi)**

5

---

**Coating C2**

Angle	L*	a*	b*	C*	h*
10					
15	58.7	- 1.4	- 26.7	26	267
25	40.8	- 4.7	- 32.	33.1	261.8
45	28.3	- 8.8	- 35.4	36.5	256.1
75	24.7	- 9.3	- 35.5	36.7	255.3

15

**Coating 2**

Angle	dL'	da'	db'	dC'	dH'	dE'	mDE'
20							
15	0.7	7.1	18.3	19	- 4.7	19.6	11.7
25	1.6	- 9.5	8.9	11	- 7.1	13.2	
45	- 2.4	- 4.7	2	- 0.5	- 5	5.6	
75	- 6.6	- 0.1	5.4	- 5.1	- 1.6	8.5	

---

25

**Table 6: Colorimetric comparison of coatings 3 and C3 (CIELAB color space/illuminant: D65/color difference mode: weighted color coordinates/color difference formula: Audi)**

5

**Coating C3**

	Angle	L*	a*	b*	C*	h*
10	15	55.1	4	3.1	5.1	37.6
	25	35.4	5.7	1.3	5.8	13.2
	45	20.7	4.6	-2.4	5.2	332.5
	75	16.6	-1.6	-3.5	3.9	246.1

15 **Coating 3**

	Angle	dL'	da'	db'	dC'	dH'	dE'	mDE'
20	15	2.9	37	36.9	52.3	2	52.4	26.6
	25	2.4	23.1	15.5	27.5	4.1	27.9	
	45	-1.3	-1.6	8.4	1.5	-8.4	8.7	
	75	-4.4	-8.5	14.6	11.1	-12.7	17.4	

**What is claimed is:**

1. An effect pigment PVC plastisol comprising
  - 5 (A) at least one finely divided PVC homopolymer having particle sizes of from 0.04 to 40  $\mu\text{m}$  which as a dispersion in a plasticizer exhibits dilatancy,
  - (B) at least one finely divided PVC homopolymer having particle  
10 sizes of from 1 to 400  $\mu\text{m}$  which as a dispersion in a plasticizer exhibits pseudoplasticity,
  - (C) at least one plasticizer, and
  - 15 (D) at least one effect pigment.
2. The PVC plastisol as claimed in claim 1, comprising at least one pigment (E) different than effect pigment (D).
- 20 3. The PVC plastisol as claimed in claim 1 or 2, comprising at least one additive (F).
4. The PVC plastisol of any of claims 1 to 3, containing from 20 to 60% by weight, based on PVC plastisol, of finely divided PVC  
25 homopolymer (A).
5. The PVC plastisol of any of claims 1 to 4, containing from 5 to 30% by weight, based on PVC plastisol, of finely divided PVC homopolymer (B).



6. The PVC plastisol as claimed in any of claims 1 to 5, wherein the weight ratio (A):(B) is chosen so that the PVC plastisol exhibits pseudoplasticity.
- 5 7. The PVC plastisol as claimed in claim 6, wherein (A):(B) = 5:1 to 1:5.
8. The PVC plastisol of any of claims 1 to 7, containing from 10 to 60% by weight, based on PVC plastisol, of plasticizers (C).
- 10 9. The PVC plastisol of any of claims 1 to 8, wherein the effect pigments (D) are selected from the group consisting of organic and inorganic, optical effect, color effect and optical effect, magnetically shielding, electrically conductive, anticorrosion, fluorescent, and  
15 phosphorescent pigments.
10. The PVC plastisol as claimed in claim 9, wherein the effect pigments (D) are selected from the group consisting of organic and inorganic, optical effect, and color effect and optical effect  
20 pigments.
11. The PVC plastisol as claimed in claim 10, wherein the effect pigments (D) are selected from the group consisting of metal effect pigments, effect pigments composed of metals and nonmetals, and  
25 nonmetallic effect pigments.
12. The PVC plastisol as claimed in any of claims 1 to 11, wherein the pigments (E) are selected from the group consisting of organic and inorganic, color and extender pigments, pigments which combine at  
30 least two of these properties, and nanoparticles.

13. The PVC plastisol as claimed in any of claims 1 to 12, wherein additives (F) are selected from the group consisting of PVC stabilizers, light stabilizers, organic solvents, and synergists for halogen flame retardants.
14. A process for producing a PVC plastisol comprising effect pigments as claimed in any of claims 1 to 13, which comprises mixing its constituents (A), (B), (C), and (D), (A), (B), (C), (D), and (E), (A), (B), (C), (D), and (F) or (A), (B), (C), (D), (E), and (F) and homogenizing the resulting mixture.
15. The use of a PVC plastisol comprising effect pigments as claimed in any of claims 1 to 13 or of a PVC plastisol comprising effect pigments and prepared by a process as claimed in claim 14 as coil coating material.
16. The use as claimed in claim 15, wherein the PVC plastisol comprising effect pigments is used to produce an effect coating.

**Abstract**

Effect pigment PVC plastisols comprising

- 5 (A) at least one finely divided PVC homopolymer having particle sizes of from 0.04 to 40  $\mu\text{m}$  which as a dispersion in a plasticizer exhibits dilatancy,
- (B) at least one finely divided PVC homopolymer having particle sizes  
10 of from 1 to 400  $\mu\text{m}$  which as a dispersion in a plasticizer exhibits pseudoplasticity,
- (C) at least one plasticizer, and
- 15 (D) at least one effect pigment;

processes for preparing them, and their use.





